# LIGHTGLASS

### DO NOT CONNECT LIGHTGLASS UNIT DIRECTLY TO LINE VOLTAGE

This will result in permanent damage and all warranty will be void.


## **WIRE LEGEND**



### STANADALONE WIRING

Each standalone unit will be provided with it's own SunDial Controller in the dedicated driver box. SunDial is pre-programmed by LIGHTGLASS and requires no commisioning.



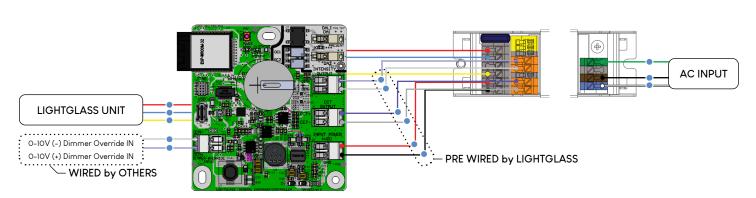

TYPE	US	CHANNEL
Warm White	Yellow	CH2-
Cool White	Blue	CH1-
Common	Red	CH1+ or CH2+

TYPE: 0-10V	WIRE COLOR	
CCT-	Gray	
CCT+	Purple	
DIM-	Gray w/ White Stripe	
DIM+	Purple w/ White Stripe	

TYPE	US	EU
Line / Phases	Black	Brown
Neutral	White	Blue
Ground	Green	Green/Yellow

## LIGHTGLASS

### DO NOT CONNECT LIGHTGLASS UNIT DIRECTLY TO LINE VOLTAGE

This will result in permanent damage and all warranty will be void.

## **WIRE LEGEND**



#### **ARRAY WIRING**

Each array of fewer than 20 units will have 1 dedicated SunDial controller. The O-10V signals from the SunDial Controller must be daisy chained and wired to each driver included for the array. Each driver powers a unique LIGHTGLASS unit.



