

# LIGHTGLASS

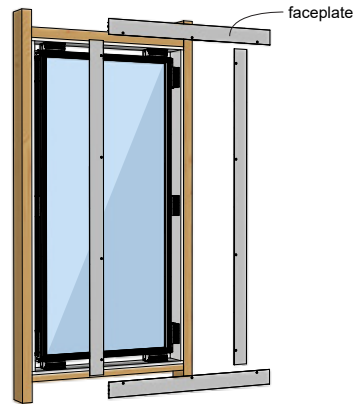
Follow standard LIGHTGLASS installation instructions up to Section 3

## SECTION 3a

Anti-Ligature Faceplate Installation

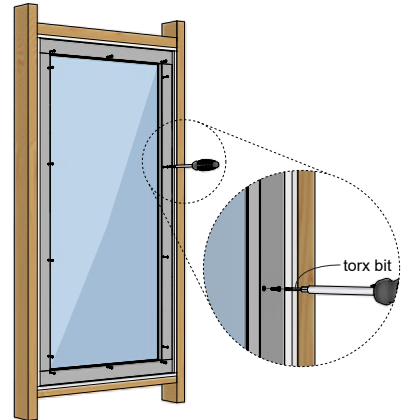
**STEP 1**

Install the faceplates by pressing firmly onto extrusion body, engaging with spring clips.

**STEP 2**

Using provided tamper-proof torx screws and bit, secure faceplates to the LIGHTGLASS fixture through the pre-drilled holes.

*NOTE: Do not over-torque torx screws. Must hand-tighten.*

**STEP 3**

Apply provided OMH approved tamper-resistant sealant (Pecora Dynaflex SC) between the LIGHTGLASS faceplates and the finished opening.

*NOTE: Dynaflex SC*

- Security grade one part polyurethane
- Resistant to ligature in 1/16" and 3/16" joint
- Medium tamper resistance
- Joints can easily be cut with utility knife
- Medium difficulty in application and tooling
- Available in 2 standard colors

